




Certified to
NSF/ANSI/CAN 61
& NSF/ANSI 372

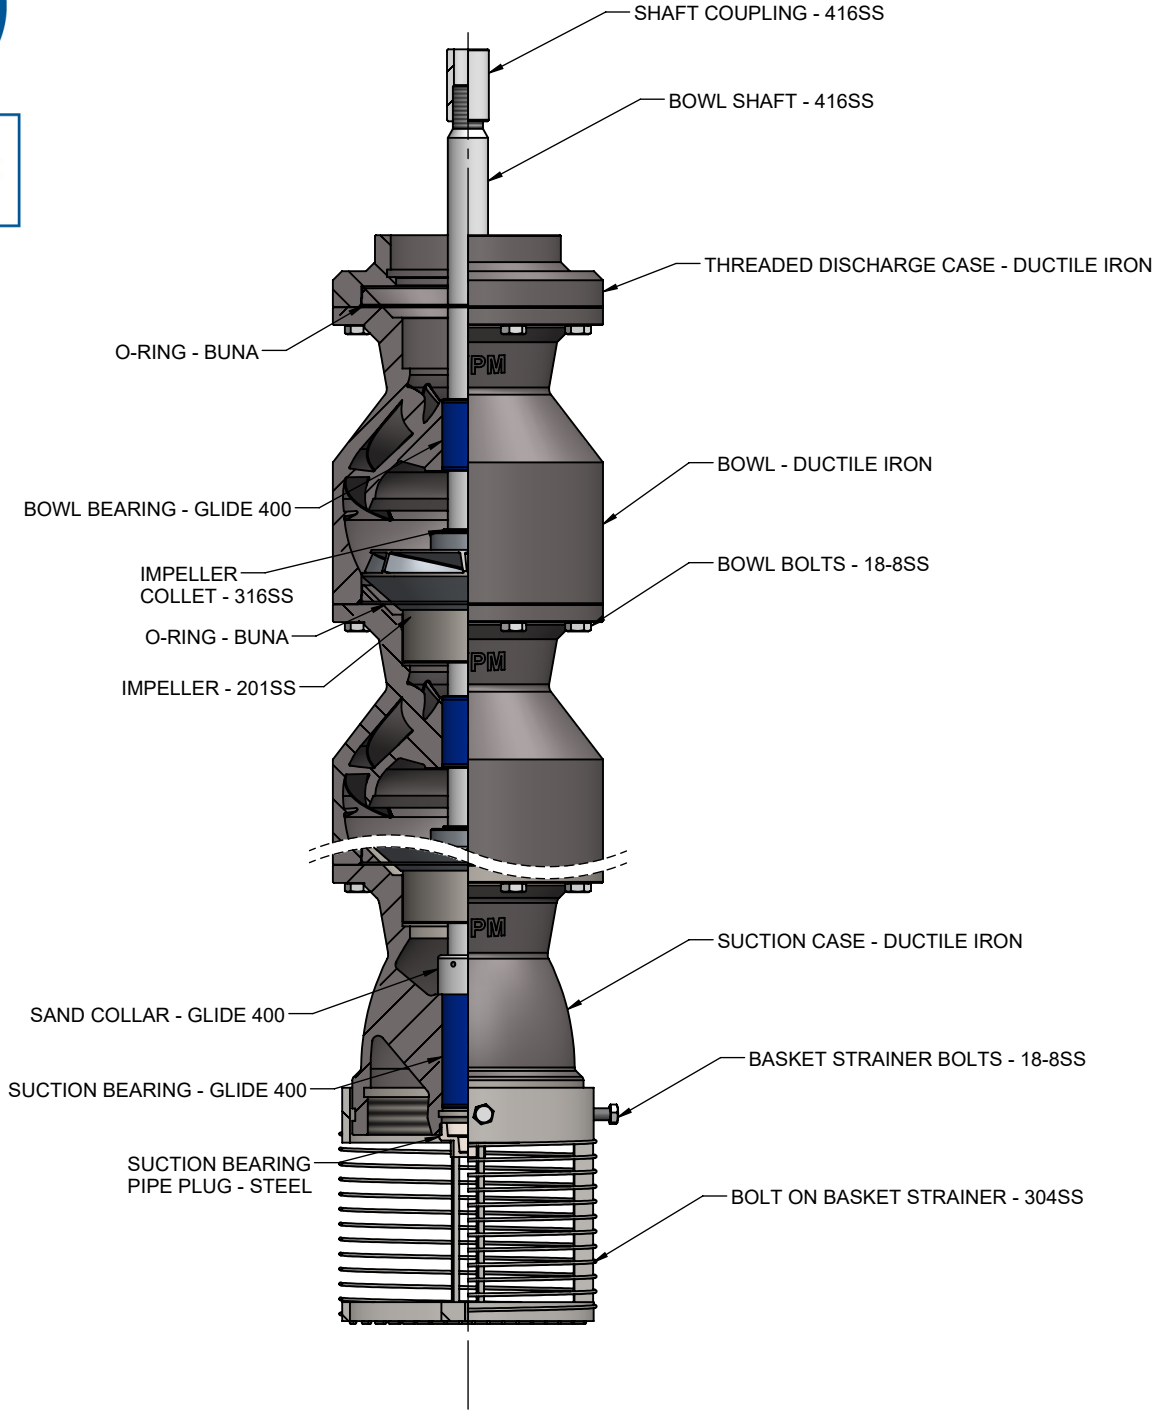

Ductile Iron 65-45-12 vs. Cast Iron: a. Higher Pressure Rating
b. Higher Abrasion Resistance
c. Higher Corrosion Resistance

201SS vs. 316SS: a. Higher Brinell Hardness 215 - 290 vs. 150 - 190
b. Higher Tensile Strength: 105 - 135 ksi vs. 80 - 90 ksi

Glide 400 Polymer Bearings vs. Bronze: a. 4 Times the Run Dry Time of Bronze 584
b. More Abrasive Resistant than Bronze 584
c. 1/4 of the Coefficient of Friction of Bronze 584
d. NSF Certified

O-ringed Bowls: a. Higher Pressure Rating
b. No Leakage Between Bowls

Stainless Steel Fasteners: a. Longer Pump Life
b. Easier to Repair/Replace Parts



DESCRIPTION:
WATERLUBE PUMP END PARTS BRAKE DOWN - 1 PIECE
DISCHARGE CASE

| | | | |
|-----------------------|-----------------------|--------------------------------|-------------------------|
| DRW BY: JDA | CHK BY: BDD | DRW DATE: 01/03/2019 | SHEET: 1 OF 1 |
| WEIGHT | PART No.: | FORM. No. ENG143 | REV A |